


### 7.3 СВЕРЛО ПО ДЕРЕВУ

Заточенная вершина для центрирования, две режущих кромки с буртиками, точная засверловка, аккуратные отверстия.  
Быстрый отвод стружки, суперстабильное

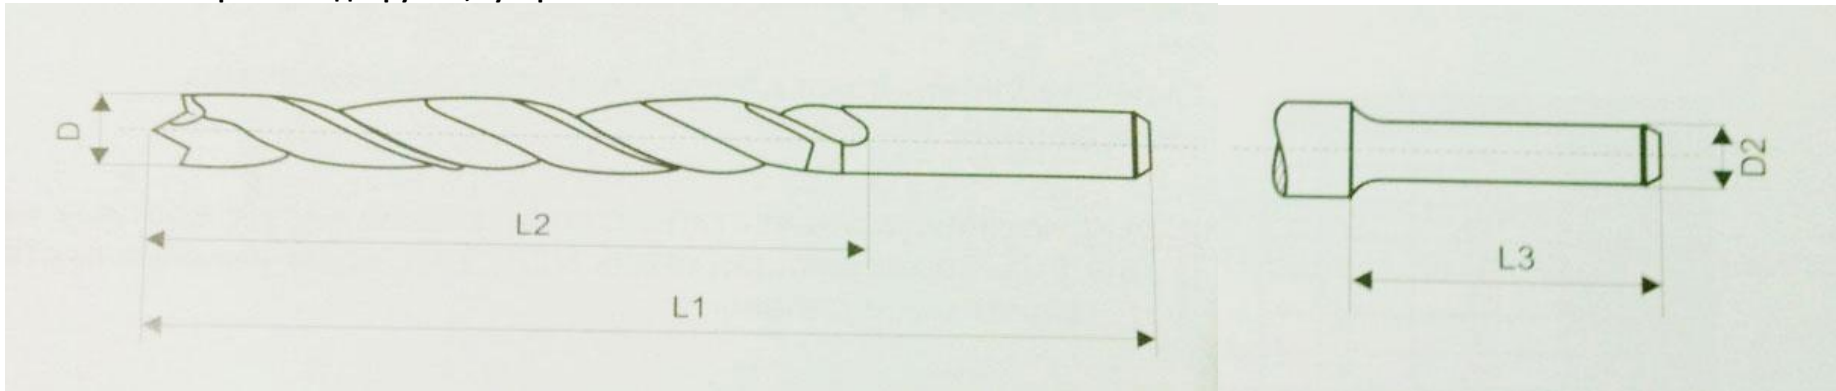

#### Технические характеристики

D	L1	L2	D1	L3	D	L1	L2	D1	L3
3	60	32			3.5	70	38		
4	75	43			4.5	80	45		
5	85	51			5.5	92	54		
6	92	54			6.5	100	60		
7	100	60			7.5	105	60		
8	115	71			8.5	115	71		
9	115	71			9.5	115	85		
10	120	82			10.5	130	82		
11	140	90			11.5	140	90		
12	140	90			12.5	150	95	12	20
13	150	95	12	20	13.5	150	95	12	20
14	150	95	12	20	14.5	160	100	12	20
15	160	100	12	20	15.5	160	100	12	20
16	160	100	12	20	16.5	170	115	12	20
18	170	115	12	20	18.5	170	115	12	20
20	180	130	12	20				20	30
22	200	150	20	30				20	30
24	200	150	20	30				20	30
26	250	170	20	30				20	30
28	250	170	20	30				20	30
30	260	180	20	30					